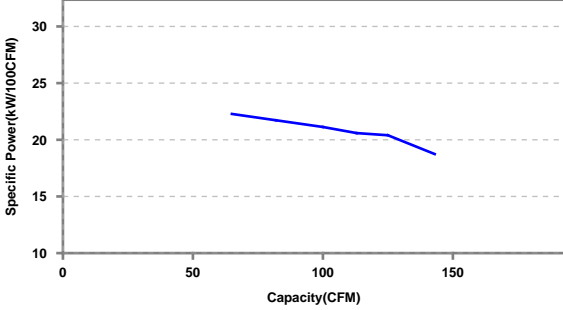


COMPRESSOR DATA SHEET

In Accordance With Federal Uniform Test Method for Certain Lubricated Air Compressors

Rotary Compressor: Variable Frequency Drive

| MODEL DATA - FOR COMPRESSED AIR | | | |
|---------------------------------|---|--------------------------------|--|
| 1 | Manufacturer: ELGi | | |
| 2 | Model Number: EG 22V-100 | | Date: 06/26/2020 |
| | <input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled | | Type: SCREW |
| | | | # of Stages: 1 |
| 3* | Full Load Operating Pressure ^b | 100 | psig ^b |
| 4 | Drive Motor Nominal Rating | 30 | hp |
| 5 | Drive Motor Nominal Efficiency | 93.6 | percent |
| 6 | Fan Motor Nominal Rating (if applicable) | 0.40 X 2 | hp |
| 7 | Fan Motor Nominal Efficiency | NA | percent |
| 8* | Input Power (kW) | Capacity (acfm) ^{a,d} | Specific Power (kW/100 acfm) ^d |
| | 27.0 | 143.0 | 18.74 |
| | 25.5 | 125.0 | 20.40 |
| | 23.3 | 113.0 | 20.59 |
| | 21.1 | 100.0 | 21.13 |
| | 17.8 | 82.0 | 21.72 |
| 8* | 14.5 | 65.0 | 22.28 |
| | | | |
| 9* | Total Package Input Power at Zero Flow ^{c, d} | 0.00 | kW |
| 10 | Isentropic Efficiency | 63.80 | % |
| 11 |  <p style="text-align: center; font-size: small;"> Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, +5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity </p> | | |

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator website for a list of participants in the third party verification program: www.cagi.org



- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:
NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Member

| Volume Flow Rate at specified conditions | | Volume Flow Rate | Specific Energy Consumption | No Load / Zero Flow Power |
|---|-----------------------|------------------|--------------------------------|---------------------------------|
| m ³ / min | ft ³ / min | % | % | % |
| Below 0.5 | Below 17.6 | +/- 7 | +/- 8 | |
| 0.5 to 1.5 | 17.6 to 53 | +/- 6 | +/- 7 | |
| 1.5 to 15 | 53 to 529.7 | +/- 5 | +/- 6 | +/- 10% |
| Above 15 | Above 529.7 | +/- 4 | +/- 5 | |

ROT 031.1